

## Central Lancashire Online Knowledge (CLoK)

Title	The effect of mountain bike wheel size on Cross-Country performance
Type	Article
URL	<a href="https://clock.uclan.ac.uk/15407/">https://clock.uclan.ac.uk/15407/</a>
DOI	<a href="https://doi.org/10.1080/02640414.2016.1215498">https://doi.org/10.1080/02640414.2016.1215498</a>
Date	2016
Citation	Hurst, Howard Thomas, Atkins, Stephen, Metcalfe, John orcid iconORCID: 0000-0002-8414-978X, Sinclair, Jonathan Kenneth and Rylands, Lee (2016) The effect of mountain bike wheel size on Cross-Country performance. Journal of Sports Sciences. ISSN 0264-0414
Creators	Hurst, Howard Thomas, Atkins, Stephen, Metcalfe, John, Sinclair, Jonathan Kenneth and Rylands, Lee

It is advisable to refer to the publisher's version if you intend to cite from the work.  
<https://doi.org/10.1080/02640414.2016.1215498>

For information about Research at UCLan please go to <http://www.uclan.ac.uk/research/>

All outputs in CLoK are protected by Intellectual Property Rights law, including Copyright law. Copyright, IPR and Moral Rights for the works on this site are retained by the individual authors and/or other copyright owners. Terms and conditions for use of this material are defined in the <http://clock.uclan.ac.uk/policies/>




**The effect of mountain bike wheel size on Cross-Country performance**

Journal:	<i>Journal of Sports Sciences</i>
Manuscript ID	RJSP-2014-1198.R2
Manuscript Type:	Special Issue
Keywords:	Power output, velocity, cadence, mountain biking

SCHOLARONE™  
Manuscripts

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

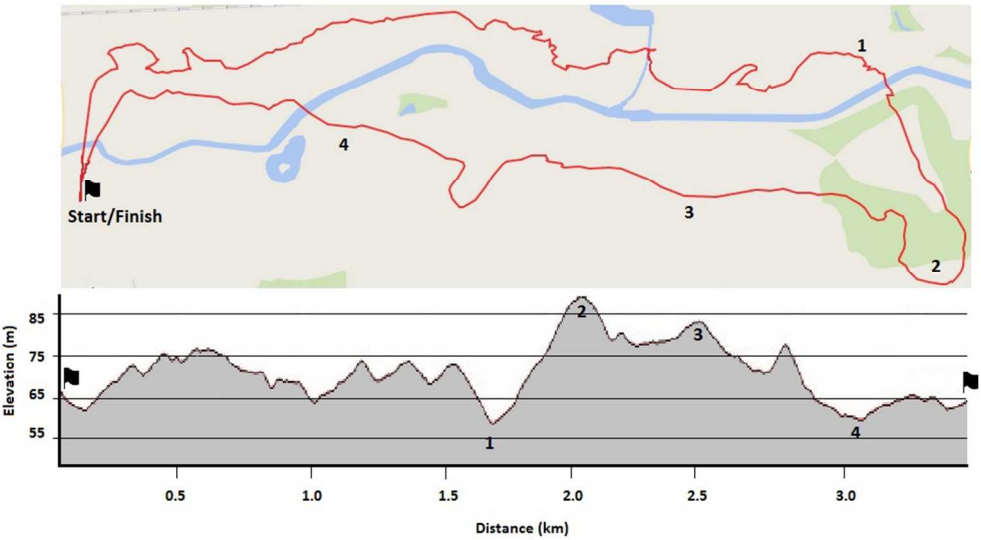

Course Profile  
264x144mm (96 x 96 DPI)

	Wheel Size (inches)	Overall	Ascent	Descent
<b>Time (s)</b>	26	916.11 ± 54.45	100.89 ± 10.97	173.11 ± 9.79
	27.5	923.78 ± 52.94	107.33 ± 8.40	177.44 ± 15.25
	29	904.22 ± 54.77	98.67 ± 16.42	176.67 ± 19.72
<b>Velocity (km.h<sup>-1</sup>)</b>	26	13.72 ± .77	13.70 ± 1.42	13.77 ± .80
	27.5	13.61 ± .76	12.81 ± .95	13.48 ± 1.13
	29	13.91 ± .84	14.20 ± 2.32	13.62 ± 1.70
<b>Absolute Power (W)</b>	26	211.06 ± 28.16	250.47 ± 52.90	205.23 ± 48.08
	27.5	211.50 ± 31.71	243.85 ± 60.75	179.57 ± 28.42
	29	220.93 ± 30.43	237.91 ± 27.61	195.81 ± 31.57
<b>Cadence (revs·min<sup>-1</sup>)</b>	26	65 ± 6	74 ± 5	55 ± 8*
	27.5	67 ± 7	72 ± 8	59 ± 9
	29	68 ± 6	71 ± 5	65 ± 7
<b>Work done (Kj)</b>	26	193.00 ± 25.03	25.33 ± 6.43	35.38 ± 7.82
	27.5	195.20 ± 29.31	26.02 ± 5.84	31.75 ± 4.67
	29	199.70 ± 29.14	23.64 ± 5.54	34.48 ± 6.49

\* Significantly different to 29" wheel ( $p < .05$ ).

Correlation Between	Wheel Size (inches)		
	26	27.5	29
Stature and Absolute Power (W)	$r = .56, p = .12$	$r = .63, p = .06$	$r = .71, p = .08$
Stature and Velocity (km.h <sup>-1</sup> )	$r = .43, p = .25$	$r = .14, p = .73$	$r = .13, p = .73$
Stature and Cadence (revs.min <sup>-1</sup> )	$r = .45, p = .22$	$r = .29, p = .45$	$r = .40, p = .29$
Stature and Relative Power (W.Kg <sup>-1</sup> )	$r = .38, p = .31$	$r = .59, p = .09$	$r = .69, p = .06$

1  
2  
3  
4  
5  
6  
7 **1 The effect of mountain bike wheel size on Cross-Country performance**

8  
9 **2 Running head:** Mountain bike wheel size and performance

10  
11  
12 **3 Keywords:** Power output, velocity, cadence, mountain biking,

13  
14 **4 Word Count:** 3975

15  
16  
17  
18  
19  
20 **6 Acknowledgments**

21  
22 7 We would like to thank Santa Cruz Bicycles in the USA and UK for their support in this  
23  
24 8 study. We could also like to confirm there were no conflicts of interest and that Santa Cruz  
25  
26 9 Bicycles' involvement was completely impartial. We would also like to thank the participants  
27  
28 10 for their time and effort in taking part in the study.  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1     **Abstract**

2     The purpose of this study was to determine the influence of different wheel size diameters on  
3     indicators of cross-country mountain bike time trial performance. Nine competitive male  
4     mountain bikers (age  $34.7 \pm 10.7$  yrs; stature  $177.7 \pm 5.6$  cm; body mass  $73.2 \pm 8.6$  kg)  
5     performed one lap of a 3.48 km mountain bike course as fast as possible on 26", 27.5" and  
6     29" wheeled mountain bikes. Time (s), mean power (W), cadence (revs·min<sup>-1</sup>) and velocity  
7     (km·h<sup>-1</sup>) were recorded for the whole lap and during ascent and descent sections. One-way  
8     repeated measure ANOVA were used to determine significant differences. Results revealed  
9     no significant main effects for any variables by wheel size during all trials, with the exception  
10    of cadence during the descent ( $F_{(2, 16)} = 8.96$ ;  $p = .002$ ;  $p^2 = .53$ ). Post hoc comparisons  
11    revealed differences lay between the 26" and 29" wheels ( $p = .02$ ). The findings indicate that  
12    wheel size does not significantly influence performance during cross-country when ridden by  
13    trained mountain bikers, and that wheel choice is likely due to personal choice or sponsorship  
14    commitments.

Formatted: Font color: Auto

## 1 Introduction

Cross-country Mountain biking has been a recognised Olympic discipline since the 1996 Atlanta Games, and requires riders to negotiate varied terrain and obstacles (Wilber, Zawadzki, Kearney, Shannon & Davis, 1997). The physiological responses to cross-country mountain biking have been extensively researched (Warner, Shaw, & Dalsky, 2002; Stapelfeldt, Schwirtz, Schumacher, & Hillebrecht, 2004; Impellizzeri, Rampinini, Sassi, Mognoni, & Marcora, 2005; Impellezzeri & Marcora, 2007; Gregory, Johns, & Walls, 2007). These studies have reported an exercise intensity during elite level racing equivalent to ~80 % of maximal oxygen uptake and ~90 % of maximal heart rate, with over 80 percent of race duration being performed at or above the lactate threshold. In addition, mean power output during cross-country racing has been reported to be approximately 240-250 W or ~3.5 W.kg<sup>-1</sup> in elite male racers (Stapelfeldt et al., 2004; Macdermid & Stannard, 2012). Macdermid et al. (2012) also reported a mean cadence of 76 revs·min<sup>-1</sup> during cross-country riding at self-selected race pace.

Several studies have also investigated the influence of mountain bike design, specifically the use of suspension systems, on performance (Seifert, Luetkemeier, Spencer, Miler, & Burke, 1997; MacRae, Hise, & Allen, 2000; Nishii, Umemura, & Kitagawa, 2004; Levy & Smith, 2005). These studies have shown that power output is generally higher when suspension is used than without, most likely the result of energy losses through the systems requiring greater effort to maintain propulsion. However, few studies have investigated to influence of different wheel diameters on mountain biking performance.



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1 Since the inception of mountain biking the standard wheel diameter has been 26". However,  
2 more recently manufacturers have developed and promoted 27.5" and 29" wheel diameter  
3 mountain bikes. Much subjective debate has occurred regarding the potential advantages and  
4 disadvantages of each of the three options. The vast majority of the debate has revolved  
5 around anecdotal evidence of improved speed and performance with the larger wheel size,  
6 with scant information being derived from empirical studies. Macdermid, Fink, and Stannard  
7 (2014) reported that at the 2012 Olympic Games the split between 26", 27.5" and 29" wheel  
8 bikes was 5, 25 and 70 % respectively, with the men's gold and bronze medals being won on  
9 a 29" wheel bike, with silver being won on a 27.5" wheel. In the women's race gold, silver  
10 and bronze medals were won on 26", 27.5" and 29" wheeled bikes respectively. Macdermid  
11 et al. (2014) investigate the performance characteristics when riding a 26" and 29" wheeled  
12 mountain bike. They found that no significant differences existed between the two wheel  
13 sizes in mean power output over a single lap at race pace, or during ascent and descent  
14 sections. Despite this, they did report significant differences in lap duration, with the 29"  
15 wheel diameter bike being significantly quicker than the 26" version (mean lap times 635 s  
16 and 616 s, respectively). However, their study didn't report cadence data or values for the  
17 increasingly popular 27.5" wheel standard. Many mountain bike manufacturers are gradually  
18 phasing out of 26" diameter wheels in favour of the 27.5" diameter. However, there remains  
19 no scientific evidence to support this trend, or the proposed benefits of the 27.5" diameter  
20 wheel for MTB performance, other than anecdotal.

21

22 Therefore, the purpose of the present study was to ascertain the influence of the three  
23 different wheel sizes on indicators of mountain bike performance during an off-road time  
24 trial. It was hypothesised that the 29" wheel would significantly improve performance during  
25 the time trials, when compared to the two smaller wheel sizes.

1

## 2 **Materials and methods**

### 3 **Participants**

4 Ethical approval for this study was granted by the University of Central Lancashire Ethics  
5 Committee and in accordance with the Declaration of Helsinki. Nine male competitive  
6 mountain bikers (age  $34.7 \pm 10.7$  yrs; stature  $177.7 \pm 5.6$  cm; body mass  $73.2 \pm 8.6$  kg) took  
7 part in the study. All riders were sub-elite, though competed at National level in their  
8 respective age categories, and had at least 5 years racing experience. Participants were  
9 informed both verbally and in writing of the test procedures, and written informed consent  
10 was obtained. Prior to testing, it was determined that all participants had previous experience  
11 of riding both 26" and 29" wheel diameter bicycles, but none reported riding a 27.5" variant.

### 13 **Course Profile**

14 Testing took place on three days over a four week period between June and July on a purpose  
15 build cross-country mountain bike course at the British National Cycle Centre (Clayton Vale,  
16 Manchester). Mean ambient temperature over the testing sessions was  $18.5 \pm 1.5$  °C,  $50.9 \pm$   
17  $3.7$  % humidity and sunny. Track conditions were dry for all test sessions. As a result, course  
18 conditions were comparable for all riders. The course was typically representative of the  
19 terrain riders would encounter during a UK cross-country race, and is itself used for regional  
20 races. The course profile presented in figure 1 was recorded using a Garmin Edge 810 GPS  
21 cycle computer. However, due to tree cover on the course and the impact this has on GPS  
22 accuracy, GPS data was not used during analysis for the determination of distance and

1  
2  
3  
4  
5  
6  
7 1 velocity. Instead, accurate distances were recorded in metres using a calibrated trundle wheel  
8  
9 2 and subsequently mean velocity ( $\text{km}\cdot\text{h}^{-1}$ ) was manually calculated.  
10  
11 3  
12  
13  
14 4 Therefore, the GPS system was used purely to provide a representative schematic of the  
15  
16 5 course (figure 1). Distances of each section highlighted in figure 1 were; Start to 1 = 1.72 km;  
17  
18 6 1 to 2 = 0.38 km (Climb); 2 to 3 = 0.47 km; 3 to 4 = 0.66 km (Descent); and 4 to Finish =  
19  
20 7 0.25 km; total lap distance = 3.48 km. Based on the mean GPS data from all laps, the average  
21  
22 8 gradient of the climb was  $5.8 \pm 0.3 \%$ , whilst the descent gradient was  $-6.1 \pm 0.4 \%$ . Though  
23  
24 9 the accuracy of this may be debated, it was not possible to gain the gradient information via  
25  
26 10 another method.

27  
28 11  
29  
30 12 \*\*\*Figure 1 near here\*\*\*  
31  
32  
33 13

34  
35  
36 14 **Equipment**

37  
38 15 All bicycles were full suspension cross-country mountain bikes with 100 mm of rear  
39  
40 16 suspension travel and 120 mm front suspension (Superlight, Santa Cruz Bicycles, USA). The  
41  
42 17 bicycles were 2014 models and were new and unused prior to testing. Each bicycle was the  
43  
44 18 same model and fitted with identical components with the exception of wheel size. All frames  
45  
46 19 geometries were designed to optimise the bicycles for their respective wheel sizes by the  
47  
48 20 manufacturer. All three bicycles had a size medium frame. Top tube lengths were 590, 602  
49  
50 21 and 613 mm for the 26", 27.5" and 29" wheels respectively, whilst bottom bracket heights  
51  
52 22 were 319, 326 and 337 mm, respectively. To accommodate differences in rider stature a  
53  
54  
55  
56  
57  
58  
59  
60

choice of two different stem lengths were offered (90 and 110 mm). Saddle setback was also adjusted to ensure best fit. In addition, riders were allowed to use their own pedals.

Bicycle mass differed due to the differences in wheel diameter and wheel mass (13.69 kg, 13.93 kg and 14.15 kg for the 26", 27.5" and 29" wheeled bicycles respectively). Mass of the bicycles is inclusive of powermeter and GPS head unit. **Therefore, as the focus of the study was on the influence of wheel size on performance and not differences in bicycle/wheel mass,** the mass was standardised to the heaviest bicycle (29" wheeled) by adding small weights to the lower downtube of the 26" and 27.5" wheeled bicycles. Suspension shocks were set up according to the manufacturers' recommendations for each rider's individual body mass to allow 10 percent sag in the travel, whilst shock leverage ratios were optimised by Santa Cruz for each frame geometry. Tyre pressure was run at 35 psi for all trials to ensure consistency. Prior to each trial bicycles were fitted with the same SRM Shimano XT 2 x 10 mountain bike powermeter chainset (SRM, Jülich, Germany). The powermeter consisted of eight strain gauges housed within the inner bolt circle. To ensure accurate data collection, the SRM powermeter was calibrated through the Garmin Edge 810 head unit prior to each trial. SRM powermeters have previously been shown to have high reliability by several studies (Jones & Passfield, 1998; Martin, Milliken, Cobb, McFadden, & Coggan, 1998; Lawton, Martin, & Lee, 1999). Power output data were also used to determine differences in mechanical work performed during each section and over the duration of the lap using equation 1.

$$\text{Mechanical Work (Kj)} = \text{Power (W)} \times \text{Time (s)} \div 1000 \quad (\text{Equation 1}).$$

1  
2  
3  
4  
5  
6  
7 1 Whilst the Garmin Edge 810 was not used to record distance or velocity, it was paired via  
8 2 ANT+ wireless protocol to the SRM and used to record time (s), mean power output (W) and  
9 3 mean cadence (revs·min<sup>-1</sup>) throughout each lap and during selected ascent and descent  
10 4 sections. Data were sampled at 1 s intervals. As GPS data were not used, riders were  
11 5 instructed to press the ‘lap’ button on the handlebar mounted GPS computer when they  
12 6 passed the start and end points of the designated ascent and descent sections of the course.  
13 7 These sections were clearly signposted on the course with coloured tape attached to trees.  
14 8 This allowed us to analyse data for these sections in isolation, along with the whole lap based  
15 9 on the distances measured with the trundle wheel and the lap times recorded.  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27

28 11 **Protocols**

29  
30 12 Participants were required to ride one lap of the course on each of the three test bicycles in a  
31 13 randomised order, with each lap being performed as fast as possible. Riders performed each  
32 14 of their three laps on the same day, with thirty minutes passive rest between laps to allow  
33 15 sufficient recovery time. Each lap was then preceded by a 10 min re-warm, consisting of low  
34 16 intensity cycling. All riders had previous experience of riding the course with the exception  
35 17 of one participant. All riders were allowed 1 hour to familiarise themselves with the course  
36 18 and the bicycles.  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46

47 20 **Statistical Analyses**

48  
49 21 Data were first downloaded from the GPS head unit to the Garmin Connect online database.  
50 22 Data were subsequently exported to Microsoft Excel before being analysed using the SPSS  
51 23 statistical software (SPSS Inc., version 20.0, Chicago, Illinois, USA). Data were confirmed to  
52  
53  
54  
55  
56  
57  
58  
59  
60

be normally distributed by means of a Shapiro-Wilk test. Differences in overall, ascent and descent time (s), mean velocity, power, cadence and work done were analysed using one-way repeated measures analysis of variance (ANOVA). In order to control for type I errors, Bonferroni corrections were employed during post hoc analyses. Effect sizes were calculated using a partial Eta<sup>2</sup> ( $\eta^2$ ). The influence of stature on performance indicators was determined using Pearson Product Moment Correlations. Significance was accepted at the  $p \leq 0.05$  level (Sinclair et al. 2013) and descriptive data were presented as mean  $\pm$  standard deviation.

## Results

\*\*\*Table 1 near here\*\*\*

When performance parameters were analysed over the duration of the full lap, no significant main effects for wheel size were found for time ( $F_{(2, 16)} = .70$ ;  $p = .51$ ;  $\eta^2 = .08$ ); velocity ( $F_{(2, 16)} = .70$ ;  $p = .45$ ;  $\eta^2 = .08$ ); absolute power ( $F_{(2, 16)} = 2.98$ ;  $p = .06$ ;  $\eta^2 = .27$ ); work done ( $F_{(2, 16)} = .68$ ;  $p = .52$ ;  $\eta^2 = .08$ ) or cadence ( $F_{(2, 16)} = 3.53$ ;  $p = .06$ ;  $\eta^2 = .31$ ). When data were analysed for the selected ascent, no significant main effects were again found for time ( $F_{(2, 16)} = 1.05$ ;  $p = .37$ ;  $\eta^2 = .12$ ); velocity ( $F_{(2, 16)} = 1.42$ ;  $p = .27$ ;  $\eta^2 = .15$ ); absolute power ( $F_{(2, 16)} = .19$ ;  $p = .83$ ;  $\eta^2 = .02$ ); work done ( $F_{(2, 16)} = .48$ ;  $p = .66$ ;  $\eta^2 = .05$ ) or cadence ( $F_{(2, 16)} = .84$ ;  $p = .45$ ;  $\eta^2 = .10$ ). Similarly, no significant main effects were found during the descent section; time ( $F_{(2, 16)} = .20$ ;  $p = .72$ ;  $\eta^2 = .02$ ); velocity ( $F_{(2, 16)} = .48$ ;  $p = .55$ ;  $\eta^2 = .06$ ); work done ( $F_{(2, 16)} = .79$ ;  $p = .47$ ;  $\eta^2 = .09$ ) or absolute power ( $F_{(2, 16)} = 1.17$ ;  $p = .34$ ;  $\eta^2 = .13$ ). However, a significant main effect was found for cadence during the descent ( $F_{(2, 16)} = 8.96$ ;  $p = .002$ ;  $\eta^2 = .53$ ). Post hoc comparisons revealed that cadence was significantly lower ( $p = .02$ ) when

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1 riding with the 26” when compared to the 29” wheel. Table 1 presents the mean  $\pm$  standard  
2 deviation values for all performance parameters during each phase of testing.  
3  
4 The same size frames with a selection of stem lengths were used to accommodate the  
5 differences in participant stature. Therefore, data were analysed to determine whether these  
6 differences in stature had any influence of performance variables between wheel sizes,  
7 despite the same size frame for each bicycle. No significant relationships were found between  
8 stature and any of the performance variables recorded. Table 2 presents the Pearson Product  
9 Moment correlation results.

11 \*\*\*Table 2 near here\*\*\*

13 **Discussion**

14 This study aimed to determine the effect of different mountain bike wheel diameters on  
15 performance indicators, during an off-road time trial. To the authors’ knowledge, this  
16 represents the first study to investigate the influence of all three current MTB wheel size  
17 standards, 26”, 27.5” and 29”. The key findings were that no significant differences were  
18 observed in relation to time, power, velocity, cadence or work done when analysed for the  
19 full lap, ascent and descent. The only exception to this was the significant difference in  
20 cadence between the 26” and 29” during the selected descent phase. Subsequently, the  
21 hypothesis that the 29” wheel would statistically improve performance over the smaller  
22 wheels has to be rejected.

1  
2  
3  
4  
5  
6  
7 1  
8  
9 2 Mean power output for the full lap was lower than that reported previously for XCO-MTB  
10  
11 3 racing (Stapelheldt et al., 2004; Impellezzeri et al., 2007; Macdermid et al., 2014),  
12  
13 4 irrespective of wheel size. This is likely to be due to the sub-elite level of the riders in the  
14  
15 5 present study compared to elite riders in the aforementioned studies. In addition, the lower  
16  
17 6 mean power output may also have been influenced by the relatively technical and twisty  
18  
19 7 nature of the course used in the present study, as this would determine when and how long  
20  
21 8 riders could apply power for. Previous research by Hurst and Atkins (2006) alluded to how  
22  
23 9 differences in terrain affected power production. Cadence was also lower than that reported in  
24  
25 10 previous studies (Macdermid et al., 2012). This again may be attributable to difference in  
26  
27 11 course terrain and the opportunity to pedal. Though not significantly different, power output  
28  
29 12 and cadence were greater for the 29" wheel when compared to the smaller diameter wheels.  
30  
31 13 Effect sizes revealed approximately 27% and 31% of the variance in mean power and  
32  
33 14 cadence over the full lap was attributable to the experimental conditions. Though around two  
34  
35 15 thirds of the variance was likely due to random errors, the remaining variance may have been  
36  
37 16 influenced by greater contact time between the ground and tyres, and the ability of the larger  
38  
39 17 wheel diameter to roll over small bumps in the trail more effectively. This would potentially  
40  
41 18 enable the rider to produce power and maintain cadence more consistently throughout the lap,  
42  
43 19 leading to the slightly higher values observed. Indeed, increased ground contact and  
44  
45 20 'rollover' ability is one of the key benefits of 29" wheels promoted by manufacturers, whilst  
46  
47 21 reduced vibrations have also been reported with larger wheels (Wilson, 2004). However,  
48  
49 22 contrary to this Macdermid et al (2014), found hardtail 29" wheels actually increased  
50  
51 23 vibrations over 26" a wheeled hardtail. However, some of the differences between studies  
52  
53 24 could again be influenced by differences in course terrain.  
54  
55 25  
56  
57  
58  
59  
60



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1 Differences in overall lap times did not reach a level of significant difference, whilst effect  
2 size revealed only approximately 8% of the variances in lap times could be attributed to the  
3 experimental design. Despite this, and accepting the relatively small sample size, the 29”  
4 wheel was on average 1.3 % quicker than the 26” and 2.1 % quicker than the 27.5” wheels  
5 over the duration of the full lap. Interestingly, Macdermid et al. (2014) reported similar,  
6 though significant, gains in time between 29” and 26” wheels during an cross-country  
7 mountain bike time trials. Though only ~1-2% quicker and non-significant, like Macdermid  
8 et al. (2014), results were collected from a single lap time trail. Despite this the results from  
9 the 29” wheel are interesting nonetheless, and over a full race distance with multiple laps,  
10 indicate 29” wheels may potentially offer a greater advantage over smaller wheel sizes.  
11 Further research under full race conditions is warranted.

12  
13 Based on the proposed improved rolling properties of larger wheels, the 27.5” wheel should  
14 in theory have also been quicker than the 26” diameter wheel bicycle. However, in order to  
15 optimise the bicycles’ performance for each wheel size, geometry did differ between frames,  
16 which may have contributed to the results. The wheelbase length of the 27.5” was longer by  
17 almost 10 mm than the other two wheel sizes, with the difference between the 26” and 29”  
18 being only 1.6 mm. As a result, the longer wheelbase may have negatively affected handling  
19 of the 27.5” wheel on the relatively technical course used in the present study, leading to the  
20 slowest overall lap times observed. Macdermid et al. (2014) reported using a 26” wheel in a  
21 frame designed for a 29” diameter wheel, though claimed the observed difference of 10 mm  
22 in mechanical trail, a key determinant of a bicycles’ handling properties, would not affect the  
23 bicycles performance. However, the findings of the present study would seem to refute this.

24

1 Differences during the ascent and descent sections were again non-significant between wheel  
2 sizes for all variables except descent cadence, with effects sizes revealing a relatively small  
3 amount of variance (range 2-15 %) for each parameter could be attributable to the  
4 experimental conditions. During the climb the 29" was only marginally quicker than the 26",  
5 though was around 10 seconds faster than the 27.5" over the 380 m long climb. However,  
6 velocity was 3.5 % and 9.8 % higher for the 29" than the 26" and 27.5", respectively, for  
7 power output that was 5.1 % and 2.4 % lower than the 26" and 27.5" wheels respectively.  
8 Again, though not to a level of significance, this may, to a small extent, be influenced by the  
9 proposed better rolling qualities of the larger 29" wheel, resulting in less effort being required  
10 to maintain forward propulsion and therefore velocity. This supposition, is in part supported  
11 by the lower work done, as indicated by the lower kilojoules observed during the ascent  
12 section for the 29" wheel over the other two sizes. Though this too did not reach a level of  
13 significance, the 29" required on average 6.7 % less work to ascend than the 26" wheel, and  
14 9.2 % less than the 27.5" wheel. However, this does not explain why the 27.5" wheel proved  
15 to be the slowest over the ascent. This wheel size is relatively new and has been promoted as  
16 a 'best of both' option between the better manoeuvrability of the 26" and the better rolling  
17 properties of the 29" wheel, yet the results of the present study do not support this logic.  
18 Despite this, it would be unfair to label the 27.5" as the worst performing bicycle tested.  
19 Reported differences were not significantly different to the other two wheel diameters, as  
20 such any differences may simply have been due either to random errors.

21  
22 During the descent section the 26" diameter wheel was approximately 2 % quicker than the  
23 27.5" and 29" diameter wheels. Though these differences were again not significant, some of  
24 the variance could have been the result of improved stability and therefore control during the  
25 tighter more technical sections of the descent compare to the 29", resulting from the lower

1  
2  
3  
4  
5  
6  
7 1 bottom bracket height (319.7 mm and 337.6 mm, for 26" and 29", respectively). However,  
8  
9 2 this does not explain why the 27.5" wheel was slower, as this too had a lower bottom bracket  
10  
11 3 height than the 29" wheel. The slower times of the 27.5" wheel during the descent may again  
12  
13 4 have been due to the longer wheelbase compromising handling on the tight, twisty sections of  
14  
15 5 the descent. This may have led to participants slowing more into corners to get round them,  
16  
17 6 whilst the higher cadence seen during descending for the 27.5" and 29" trials may have been  
18  
19 7 the result of riders having pedal faster out of corners to get back up to speed.

20  
21 8  
22  
23 9 **Limitations**

24  
25  
26 10 Possible limitations to the present study are the lack of physiological measures such as heart  
27  
28 11 rate and oxygen uptake. However, given the rapid changes in effort associated with cross-  
29  
30 12 country mountain biking and the lag time in heart rate response to changes in intensity, it was  
31  
32 13 anticipated that heart rate would change little in response to the different wheel sizes and  
33  
34 14 therefore yield little benefit to the study. In addition, previous studies have shown heart rate  
35  
36 15 to be remarkably consistent throughout mountain bike races, potentially due to increased  
37  
38 16 isometric muscular activity over that observed in road cycling (Hurst & Atkins, 2006), and as  
39  
40 17 a result of possible increases in adrenaline levels and subsequent stimulation of the  
41  
42 18 sympathetic nervous system (Sperlich, Achtzehn, Buhr, Zinner, Zelle, & Holmberg, 2012).  
43  
44 19 Oxygen uptake, was not monitored during the present study despite being used in previous  
45  
46 20 research (MacRae et al., 2000; Macdermid et al., 2012). The authors of the present study felt  
47  
48 21 that although this may have been of interest, the increased mass of the equipment and the  
49  
50 22 intrusive nature of wearing a facemask may have influenced the natural riding dynamics of  
51  
52 23 the participants, thus compromising the ecological efficacy of the investigation. Indeed,  
53  
54 24 feedback from riders during pilot testing reported the gas analyser and facemask restricted

1 movement and increased discomfort due to sweat build up in the facemask. Therefore, the  
2 decision was made not to monitor this variable.

3  
4 Though participants were given time to familiarise themselves with the course and the  
5 bicycles, this may not have been sufficient to learn the full capabilities of the relatively newer  
6 27.5" wheel size. It is also accepted that multiple timed laps on different courses are need to  
7 fully determine the extent of any differences between wheel sizes. However, the current  
8 findings are still of interest nonetheless. Finally, though riders were not 'blinded' to the data  
9 on the GPS unit, it is unlikely that this would have led to changes in pacing strategies, as  
10 riders were more likely to be focusing on the trail ahead than looking at the handlebar  
11 mounted unit, particularly given the relatively technical nature of the course used.

## 12 13 **Conclusions**

14 To summarise, the present study revealed no statistically significant differences for all  
15 recorded parameters between the three wheel sizes, with the exception of cadence during the  
16 downhill section. However, further research over a full race distance is warranted to  
17 determine if the small but non-significant differences observed over a one lap time trial in the  
18 present study lead to significant benefits or drawbacks over the course of a race. In addition,  
19 it is important to note that the findings of the present study only relate to the particular course  
20 used, and as alluded to by previous research, results may differ depending upon terrain.

## 21 22 **References**

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

Gregory, J., D. Johns, and J. Walls. (2007) Relative vs absolute physiological measures as predictors of mountain bike cross-country race performance. *Journal of Strength & Conditioning Research*, 21, 17-22.

Hurst, H.T., and S. Atkins. 2006. Power output of field-based downhill mountain biking. *Journal of Sports Sciences*, 24, 1047-1053.

Impellizzeri, F., and S. Marcora. (2007) The physiology of mountain biking. *Sports Medicine*, 37, 59-71.

Impellizzeri, F., E. Rampinini, A. Sassi, P. Mogroni, and S. Marcora. (2005) Physiological correlates to off-road cycling performance. *Journal of Sports Sciences*, 23, 41-47.

Jones, S.M. and Passfield, L. (1998) The dynamic calibration of bicycle power measuring cranks. In Haake, S.J. (ed). *The Engineering of Sport*, Oxford, Blackwell Science, 265-274.

Lawton, E.W., Martin, D.T. and Lee, H. (1999) Validation of SRM powercrank using dynamic calibration. *5<sup>th</sup> IOC World Congress on Sport Sciences*, Sydney, Australia, 31 Oct-5 Nov.

Levy, M. and Smith, G. (2005) Effectiveness of vibration damping with bicycle suspension systems. *Sports Engineering*, 8, 99-106.

Macdermid, P.W., Fink, P.W. and Stannard R. (2014) Transference of 3D accelerations during cross country mountain biking. *Journal of Biomechanics*, 47, 1829-1827.

Macdermid, P.M. and Stannard, S. (2012) Mechanical work and physiological responses to simulated cross country mountain bike racing. *Journal of Sports Science*, 30, 1491-1501.

MacRae, H.S.H., K.J. Hise, and P.J. Allen. (2000) Effects of front and dual suspension mountain bike systems on uphill cycling performance. *Medicine and Science in Sports and Exercise*, 32, 1276-1280.

Martin, J.C., Milliken, D.C., Cobb, J.E., McFadden, K.L. and Coggan, A.R. (1998) Validation of a mathematical model for road cycling power. *Journal of Applied Biomechanics*, 14, 276-291.

Nishii, T., Umemura, Y. and Kitagawa, K. (2004) Full suspension mountain bike improves off-road cycling performance. *Journal of Sports Medicine and Physical Fitness*, 44, 356-360.

Seifert, J.G., Luetkemeier, M.J., Spencer, M.K., Miller, D. and Burke, E.R. (1997) The effects of mountain bike suspension systems on energy expenditure, physical exertion, and time trial performance during mountain bicycling. *International Journal of Sports Medicine*, 18, 197-200.

Sinclair, J., Taylor, P.J. and Hobbs, S.J. (2013) Alpha level adjustments for multiple dependent variable analyses and their applicability – A review. *International Journal of Sport Science and Engineering*, 7, 17-20.

- 1  
2  
3  
4  
5  
6  
7 1 Sperlich, B., S. Achtzehn, M. Buhr, C. Zinner, S. Zelle, and H-C. Holmberg. (2012) Salivary  
8 2 cortisol, heart rate, and blood lactate responses during elite downhill mountain bike racing.  
9 3 *International Journal of Sports Physiology and Performance*, 7, 47–52.  
10 4  
11 5 Stapelfeldt, B., A. Schwirtz, Y.O. Schumacher, and M. Hillebrecht. (2004) Workload  
12 6 demands in mountain bike racing. *International Journal of Sports Medicine*, 25, 294-300.  
13 7  
14 8 Warner, S., J. Shaw, and G. Dalsky. (2002) Bone mineral density of competitive male  
15 9 mountain and road cyclists. *Bone*, 30, 281-286.  
16 10  
17 11 Wilber, R.L., K.M. Zawadzki, J.T. Kearney, M.P. Shannon, and D. Disalvo. (1997)  
18 12 Physiological profile of elite off-road and road cyclists. *Medicine and Science in Sports and*  
19 13 *Exercise*, 29, 1090-1094.  
20 14  
21 15 Wilson. (2004) *Bicycling Science*. Mit Press.  
22 16  
23 17  
24 18

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1     **Figure 1.** Schematic and GPS map of MTB course. Numbers refer to each section of the  
2     course.  
3

For Peer Review Only

1  
2  
3  
4  
5  
6  
7 **Table 1.** Mean  $\pm$  standard deviation for mean performance variables recorded during the full  
8  
9 lap and during the selected ascent and descent phases.  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60

1     **Table 2. Pearson Product Moment Correlation coefficient (*r*) between stature and**  
2     **performance variables for each wheel diameter (*N*= 9).**

For Peer Review Only