

## Central Lancashire Online Knowledge (CLoK)

Title	Can shoulder impairments be classified from three-dimensional kinematics using inertial sensors?
Type	Article
URL	<a href="https://clock.uclan.ac.uk/46515/">https://clock.uclan.ac.uk/46515/</a>
DOI	<a href="https://doi.org/10.1123/jab.2022-0173">https://doi.org/10.1123/jab.2022-0173</a>
Date	2023
Citation	Mazuquin, Bruno Fles, Gill, Karl Peter, Monga, Puneet, Selfe, James and Richards, James (2023) Can shoulder impairments be classified from three-dimensional kinematics using inertial sensors? Journal of Applied Biomechanics.
Creators	Mazuquin, Bruno Fles, Gill, Karl Peter, Monga, Puneet, Selfe, James and Richards, James

It is advisable to refer to the publisher's version if you intend to cite from the work.  
<https://doi.org/10.1123/jab.2022-0173>

For information about Research at UCLan please go to <http://www.uclan.ac.uk/research/>

All outputs in CLoK are protected by Intellectual Property Rights law, including Copyright law. Copyright, IPR and Moral Rights for the works on this site are retained by the individual authors and/or other copyright owners. Terms and conditions for use of this material are defined in the <http://clock.uclan.ac.uk/policies/>

1 **Can shoulder impairments be classified from three-dimensional kinematics using**  
2 **inertial sensors?**

3

4 **Bruno Mazuquin<sup>1</sup> Karl Peter Gill<sup>1,2</sup>, Puneet Monga<sup>3</sup>, James Selfe<sup>1</sup>, Jim Richards<sup>4</sup>**

5 1. Department of Health Professions, Manchester Metropolitan University, Brooks Building,  
6 53 Bonsall St, Manchester, M15 6GX, UK

7 2. Department of Physiotherapy, Northern Care Alliance NHS Group, Fairfield General  
8 Hospital, Rochdale Old Road, Bury, BL9 7TD, UK.

9 3. Wrightington Hospital, Hall Lane, Wigan, Lancashire, WN6 9EP, UK

10 4. Allied Health Research Unit, University of Central Lancashire, Brooks Building, Victoria  
11 Street, Preston, PR1 2HE, UK

12

13

14 **Corresponding author: Bruno Mazuquin** Department of Health Professions, Manchester  
15 Metropolitan University, Brooks Building, 53 Bonsall St, Manchester, M15 6GX, United  
16 Kingdom.

17 E-mail: [b.mazuquin@mmu.ac.uk](mailto:b.mazuquin@mmu.ac.uk)

18

19

20

21

22

23

24

25 Declarations of interest: **none**

26

27

28 Abstract word count: **192**

29 Manuscript word count: **1753**

30 No. Figures: **1**

31 No. Tables: **5**

32

1 **ABSTRACT**

2 **Background:** Magnetic Resonance Imaging and ultrasound imaging are often used for clinical  
3 decision making to confirm diagnosis and plan treatment in shoulder problems, but this can be  
4 costly and reporting the findings can take time. The aim was to determine whether range of  
5 shoulder motion during movement tasks measured using inertial sensors are capable of  
6 accurately discriminating between patients with different shoulder problems.

7 **Methods:** Inertial sensors were used to measure three-dimensional shoulder motion during six  
8 tasks of 37 patients on the waiting list for shoulder surgery. Discriminant analysis was used to  
9 identify whether the range of motion of different tasks could classify patients with different  
10 shoulder problems.

11 **Results:** The discriminant analysis could correctly classify 91.9% of patients into one of the  
12 three diagnostic groups based. The tasks that associated a patient with a particular diagnostic  
13 group were: subacromial decompression: abduction; rotator cuff repair with tears  $\leq 5$  cm:  
14 flexion and rotator cuff repair with tears  $> 5$  cm: combing hair, abduction and horizontal  
15 abduction-adduction.

16 **Conclusions:** The discriminant analysis showed that range of motion measured by inertial  
17 sensors can correctly classify patients and could be used as a screening tool to support  
18 surgery planning.

19

20

21

22 **Keywords:** Inertial sensors, shoulder, rotator cuff, discriminant analysis

1 **1. INTRODUCTION**

2 Treatments for shoulder problems include physiotherapy, injections and surgery.<sup>1</sup> To help with  
3 clinical decision-making, imaging examinations are often used to confirm diagnosis and  
4 treatment planning. Both Ultrasound Scanning (USS) and Magnetic Resonance Imaging (MRI)  
5 are used in the detection of rotator cuff tears. A Cochrane systematic review reported that there  
6 were no differences in sensitivity and specificity between MRI and USS for detecting full- or  
7 partial-thickness rotator cuff tears.<sup>2</sup> Imaging such as Magnetic Resonance Imaging (MRI), can  
8 be costly and if there is great demand, may delay treatment.<sup>3</sup> During clinical examination, the  
9 use of a screening tool that accurately identifies cases where imaging is required for surgical  
10 planning could help reduce overall costs and waiting lists for imaging procedures. Three-  
11 dimensional motion analysis using inertial sensors has been shown to be able to aid clinicians  
12 in identifying altered movement patterns in patients with shoulder problems.<sup>4</sup> Inertial sensors  
13 are a relatively new tool that can be easily used in the clinical setting due to their good  
14 ecological validity.<sup>3</sup> Thus, they have potential to be used as an alternative to more expensive  
15 or less accurate methods of identifying the underlying causes of shoulder pain.<sup>5,6</sup> Other studies  
16 have used inertial sensors to compare movement patterns of patients with various shoulder  
17 disorders though they only assessed single-plane movements in unloaded conditions.<sup>7,8</sup> It is  
18 also unknown whether inertial sensors can accurately classify patients with different types of  
19 shoulder problems using kinematic variables. The aim of this study was to determine whether  
20 measuring range of shoulder motion (ROM) during common clinical and daily tasks using  
21 inertial sensors is capable of accurately discriminating patients with various degrees of rotator  
22 cuff tendon problems.

23

24

1 **2. METHOD**

2 **2.1 Participants**

3 Patients aged between 40 and 70 years old, who were on the waiting list for shoulder surgery  
4 in a single hospital were recruited. Patients were classified into one of three groups according  
5 to the surgery they were listed for: subacromial decompression (SAD), rotator cuff repair with  
6 tears of up to 5 cm ( $RCR \leq 5\text{cm}$ ), and tears greater than 5 cm ( $RCR > 5\text{cm}$ ). Size and  
7 classification of the rotator cuff tear was determined using MRI or USS according to local  
8 clinical pathways and clinician preference. We excluded patients who had had previous  
9 shoulder surgery and/or other musculoskeletal impairment in the assessed limb or cervical and  
10 thoracic spine, people who were unable to understand instructions or non-English speakers.  
11 This study received ethical approval (University of Central Lancashire STEMH 462).

12

13 **2.2 Procedures**

14 Each patient performed five repetitions of six tasks in a randomised order (Table 1).

15

16 **Table 1.** Description of the movement tasks. <sup>7,9,10</sup>

Task	Description
1) Combing hair	Simulated combing movements taking the hand from the front to the back of the head.
2) Abduction	Maximum abduction in the coronal plane.
3) Horizontal abduction-adduction	Horizontal shoulder abduction and adduction holding a 1kg dumbbell with the elbow in extension.
4) Reaching behind back	The participants tried to reach their opposite back pocket.

- |                      |  |
|----------------------|--|
| 5) Flexion-extension | Maximal forward flexion and extension in the sagittal plane.   |
| 6) Lifting           | With the arm resting beside their body, the participant raised a 1kg dumbbell to the highest point above their head. |
- 

1

2 The Xsens/MVN system (Xsens Tech®, Enschede, Netherlands) was used to collect 3D  
3 movements of the shoulder at 120 Hz. The manufacturer has reported that pitch and roll was  
4 accurate to  $<0.5^\circ$  and yaw was accurate to  $1^\circ$ , and confirmed by independent research <sup>11</sup>. All  
5 sensors were attached to the patient's body with Velcro® strips over their clothes (Figure 1).  
6 The sensor placement, body acquisition configuration (upper body) and calibration procedures  
7 followed the recommendations from the equipment manual.<sup>12</sup> For each task, ROM was  
8 calculated by subtracting the glenohumeral joint angle at the final position of the task from the  
9 glenohumeral joint angle at the initial position of the task.

10

11 **Insert Figure 1 about here**

## 12 **2.3 Statistics**

13 Mean and standard deviation of the ROM was calculated for each task. Discriminant analysis  
14 using the Wilk's Lambda method was used to identify which of the tasks would be able to  
15 discriminate between the three groups, SAD,  $RCR \leq 5\text{cm}$  and  $RCR > 5\text{cm}$  using cut-off points  
16 from the function at group centroids. Those tasks whose standardized canonical discriminant  
17 function coefficients were greater than the cut-off points were selected to discriminate between  
18 the three groups. The matrices of homogeneity were tested using Box's M test, and a  
19 classificatory analysis and cross-validation was used to check allocation accuracy for the  
20 discriminant analysis.<sup>13 14</sup>

1 **3. RESULTS**

2 Thirty-seven patients were recruited. The descriptive data for each task and surgical group is  
 3 detailed in Table 2.

4  
 5 **Table 2.** Mean and standard deviation of the ROM of each task for each surgical group  
 6 (discriminant tasks for each group are in bold).

Task (degrees)	Subacromial decompression (n=15) $\bar{x}$ (SD)	Rotator cuff tears $\leq$ 5 cm (n=18) $\bar{x}$ (SD)	Rotator cuff tears > 5 cm (n=4) $\bar{x}$ (SD)
Combing	113.02 (8.73)	84.73 (24.19)	<b>73.67 (23.83)</b>
Abduction	<b>110.03 (23.09)</b>	72.23 (34.40)	<b>75.01 (40.56)</b>
Horizontal abduction- adduction	73.08 (14.59)	51.41 (25.27)	<b>45.56 (31.0)</b>
Reaching behind back	-19.94 (5.37)	-21.47 (6.08)	-17.80 (4.26)
Flexion-extension	125.65 (22.09)	<b>115.31 (36.08)</b>	83.62 (36.53)
Lifting	116.76 (33.78)	103.20 (37.25)	77.99 (39.73)

7  
 8  
 9 The first function was chosen as the best to discriminate groups based on its capacity to explain  
 10 the percentage of variance and the high canonical correlation value (0.854). The test of function  
 11 indicated an ability to significantly discriminate groups (Wilks Lambda: 0.196, Chi-square  
 12 51.4,  $P < 0.001$ ). The function at group centroid cut-off points were; -1.580, 0.587 and 1.740  
 13 for the  $RCR \leq 5$ ,  $RCR > 5$  and SAD groups, respectively (Table 3).

1 **Table 3.** Function at Group Centroid Values.

Function at group centroids		
Group	Function	
	1	2
Subacromial decompression	1.740	0.294
Rotator cuff tears $\leq 5$ cm	-1.580	0.130
Rotator cuff tears $> 5$ cm	0.587	-1.688

2  
3  
4

5 The standardized canonical discriminant function coefficients used to select the discriminant  
6 variables for each group are detailed in Table 4.

7 **Table 4.** Standardized canonical discriminant function coefficients and the associated surgical  
8 group for each task.

	Function		Associated group for each task
	1	2	
Combing	1.062	0.799	RCR $>5$ cm
Abduction	1.775	-0.794	RCR $>5$ cm / SAD
Horizontal abduction- adduction	0.689	0.001	RCR $>5$ cm
Reaching behind back	-0.514	-0.199	-----
Flexion-extension	-3.033	1.025	RCR $<5$ cm
Lifting	0.084	-0.263	-----

9 SAD: subacromial decompression. RCR: rotator cuff repairs.  
10 The Function at Group Centroids were 1.740 for SAD, -1.580 for RCR  $\leq 5$ , and 0.587 for RCR  
11  $> 5$ . The values of Function 1 were chosen if they exceeded the threshold value for a specific  
12 group

13

14 The discriminant variables for each group were, SAD: abduction, RCR  $\leq 5$  cm: flexion-  
15 extension and RCR  $> 5$  cm: combing, abduction and horizontal abduction-adduction. Based on  
16 these discriminant variables the classificatory analysis could correctly classify 91.9% of the  
17 individuals, while the cross-validated analysis showed an accuracy of 75.7% (Table 5).

18



1 **Table 5.** Classificatory and cross-validation analyses.

		Predicted Group Membership				
			SAD	RCR≤5cm	RCR>5cm	Total
Classificatory <sup>a</sup>	Count	SAD	15	0	0	15
		RCR≤5	1	16	1	18
		RCR>5	1	0	3	4
	%	SAD	100.0	0	0	100.0
		RCR≤5	5.6	88.9	5.6	100.0
		RCR>5	25.0	0	75.0	100.0
Cross-validated <sup>b</sup>	Count	SAD	13	1	1	15
		RCR≤5	2	14	2	18
		RCR>5	2	1	1	4
	%	SAD	86.7	6.7	6.7	100.0
		RCR≤5	11.1	77.8	11.1	100.0
		RCR>5	50.0	25.0	25.0	100.0

SAD: subacromial decompression. RCR: rotator cuff repairs

<sup>a</sup>. 34 out of 37 (91.9%) of original grouped cases correctly classified.

<sup>b</sup>. Cross-validation is done only for those cases in the analysis. In cross-validation, each case is classified by the functions derived from all cases other than that case.

2 **4. DISCUSSION**

3 The objective of this study was to investigate whether the measurement of shoulder ROM  
 4 during six tasks using 3D kinematics could accurately classify patients according to their  
 5 shoulder problems. Generally, discriminant analyses have been used to identify talents in sports  
 6 and to select which variables are best to classify subjects to groups.<sup>13,15</sup>

1 Classificatory accuracy was compared to the imaging results prior to listing for surgery,  
2 whether that was USS or MRI. However, as MRI and USS have similar sensitivity and  
3 specificity for detecting full- or partial-thickness rotator cuff tears this wasn't thought affect  
4 the results. Almost 92% of the cases were correctly classified and cross-validation confirmed  
5 the discriminant capacity of the assessment protocol using the four discriminant tasks;  
6 abduction, flexion, combing hair and horizontal abduction-adduction. These values are high  
7 and substantially greater than a classification by chance, which in this analysis of 3 groups  
8 would be 33.33%. Successful classifications should be above 80%;<sup>15</sup> the classificatory analysis  
9 fulfilled this criteria, but the cross-validation, which checks the discriminant analysis accuracy  
10 case-by-case, was just under that threshold. One possible reason for the cross-validation not  
11 reaching at least 80% might be due to the low number of patients in the RCR>5 group.

12 The discriminant analysis showed great applicability for the use of inertial sensors when  
13 assessing four tasks which could be used to classify patients based on their shoulder ROM. The  
14 only other study that has used discriminant analysis to classify patients with shoulder disorders  
15 was Colliver, Wang, Joss, et al.<sup>16</sup> who used discriminant analysis to determine whether surgical  
16 repair integrity could be classified by clinical questionnaires. Their results showed that  
17 questionnaires could only classify 36% of the intact repairs.

18 Similar to our study, Kolk, Henseler, de Witte, et al.<sup>7</sup> performed an analysis where inertial  
19 sensors were used to assess movement differences between patients with shoulder pain but no  
20 anatomical alterations to cuff muscles or tendons, an isolated supraspinatus tear, or a massive  
21 rotator cuff tear of greater than 5cm. They found that patients with a massive rotator cuff tear  
22 had a greater reduction in flexion and abduction compared to the other two groups. However,  
23 they did not find any group differences in movement in patients with either shoulder pain or an  
24 isolated supraspinatus tear. In contrast, we found that patients undergoing subacromial

1 decompression had better ROM than those with a tear smaller than 5 cm; however, our RCR $\leq$   
2 5 cm group included patients with tears spanning beyond the supraspinatus tendon only.

3 Using inertial sensors to classify shoulder disorders based on four movement tasks has the  
4 potential to be of great clinical use as a screening tool to accurately identify which patients  
5 require further imaging when classified into one of the three surgical groups. It may be possible  
6 to incorporate such analysis within smartphones or wearable sensors, allowing access to initial  
7 diagnostic assessments thus relieving pressure on MRI based diagnostic workflows, as waits  
8 for the result of this form of investigation can be longer than six weeks in many cases <sup>17</sup>, and  
9 reducing the cost burden, as for example each shoulder MRI costs approximately £200 <sup>18</sup>.

10 As this paper looked at the allocation accuracy of the discriminant analysis only, further work  
11 is needed to fully establish the sensitivity and specificity of this classification system using  
12 inertial sensors as well as comparing the accuracy of smartphone or other cheap wearable  
13 sensors with the Xsens system used in this study. Other studies could focus on including inertial  
14 sensor data from the four movement tasks alongside MRI or ultrasound imaging to improve  
15 diagnosis and surgical decision making.

16

## 17 **5. CONCLUSION**

18 The use of inertial sensors to assess shoulder ROM appear to be a valuable tool to accurately  
19 classify patients with different shoulder problems. The tasks that associated a patient with a  
20 particular diagnostic group were: subacromial decompression, abduction; rotator cuff repair  
21 with tears  $\leq$ 5 cm, flexion; and rotator cuff repair with tears  $>$  5 cm, combing hair, abduction  
22 and horizontal abduction-adduction. These have the potential to offer a quick assessment which  
23 could be performed by clinicians and may allow faster clinical decision making.

1 **ACKNOWLEDGEMENTS:**


2 **FUNDING:** The last author was awarded a Doctoral fellowship from CAPES, Brazil (BEX  
3 11931/2013-02).

4


## 1 REFERENCES

- 2 1. Keene DJ, Soutakbar H, Hopewell S, et al. Development and implementation of the  
3 physiotherapy-led exercise interventions for the treatment of rotator cuff disorders for  
4 the 'Getting it Right: Addressing Shoulder Pain' (GRASP) trial. *Physiotherapy*.  
5 2020;107:252-266.
- 6 2. Lenza M, Buchbinder R, Takwoingi Y, Johnston RV, Hanchard NCA, Faloppa F.  
7 Magnetic resonance imaging, magnetic resonance arthrography and ultrasonography  
8 for assessing rotator cuff tears in people with shoulder pain for whom surgery is being  
9 considered. *Cochrane Database of Systematic Reviews*. 2013(9).
- 10 3. O. AlRowaili M, Ahmed AE, Areabi HA. Factors associated with No-Shows and  
11 rescheduling MRI appointments. *BMC Health Services Research*. 2016;16(1):679.
- 12 4. Keshavarz R, Bashardoust Tajali S, Mir SM, Ashrafi H. The role of scapular kinematics  
13 in patients with different shoulder musculoskeletal disorders: A systematic review  
14 approach. *Journal of Bodywork and Movement Therapies*. 2017;21(2):386-400.
- 15 5. Mayagoitia RE, Nene AV, Veltink PH. Accelerometer and rate gyroscope measurement  
16 of kinematics: An inexpensive alternative to optical motion analysis systems. *Journal*  
17 *of Biomechanics*. 2002;35(4):537--542.
- 18 6. Chung WM, Yeung S, Chan WW, Lee R. Validity of VICON Motion Analysis System  
19 for Upper Limb Kinematic MeasuremeNT - A Comparison Study with Inertial  
20 Tracking Xsens System. *Hong Kong Physiotherapy Journal*. 2011;29(2):97.
- 21 7. Kolk A, Henseler JF, de Witte PB, et al. The effect of a rotator cuff tear and its size on  
22 three-dimensional shoulder motion. *Clinical Biomechanics*. 2017;45:43-51.
- 23 8. Kwak J-M, Ha T-H, Sun Y, Kholinne E, Koh K-H, Jeon I-H. Motion quality in rotator  
24 cuff tear using an inertial measurement unit: new parameters for dynamic motion  
25 assessment. *Journal of Shoulder and Elbow Surgery*. 2020;29(3):593-599.
- 26 9. Garofalo P. *Development of motion analysis protocols based on inertial sensors*,  
27 Univesity of Bologna; 2010.
- 28 10. Parel I. Validation and Application of a Shoulder Ambulatory Motion. 2012:171.
- 29 11. Mourcou Q, Fleury A, Franco C, Klopčic F, Vuillerme N. Performance Evaluation of  
30 Smartphone Inertial Sensors Measurement for Range of Motion. *Sensors*  
31 2015;15(9):23168-23187.
- 32 12. MVN user manual. In:2010.
- 33 13. Mazuquin BF, Pereira LM, Dias JM, et al. Isokinetic evaluation of knee muscles in  
34 soccer players: discriminant analysis. *Revista Brasileira de Medicina do Esporte*.  
35 2015;21(5):364--368.
- 36 14. Nogueira JF, Carrasco AC, Pelegrinelli ARM, et al. Posturography Comparison and  
37 Discriminant Analysis Between Individuals With and Without Chronic Low Back Pain.  
38 *Journal of Manipulative and Physiological Therapeutics*. 2020;43(5):469-475.
- 39 15. Carter JEL, Ackland TR. Sexual dimorphism in the physiques of World Championship  
40 divers. *Journal of Sports Sciences*. 1998;16(4):317--329.
- 41 16. Colliver J, Wang A, Joss B, et al. Early postoperative repair status after rotator cuff  
42 repair cannot be accurately classified using questionnaires of patient function and  
43 isokinetic strength evaluation. *Journal of shoulder and elbow surgery*. 2016;25(4):536-  
44 542.
- 45 17. NHS Diagnostic Waiting Times and Activity Data  
46 ([https://www.england.nhs.uk/statistics/wp-content/uploads/sites/2/2021/03/DWTA-](https://www.england.nhs.uk/statistics/wp-content/uploads/sites/2/2021/03/DWTA-Report-January-2021-8DKMV.pdf)  
47 [Report-January-2021-8DKMV.pdf](https://www.england.nhs.uk/statistics/wp-content/uploads/sites/2/2021/03/DWTA-Report-January-2021-8DKMV.pdf)). Accessed: 01/01/2022.
- 48 18. NHS national tariff ([https://www.england.nhs.uk/publication/national-tariff-payment-](https://www.england.nhs.uk/publication/national-tariff-payment-system-documents-annexes-and-supporting-documents/)  
49 [system-documents-annexes-and-supporting-documents/](https://www.england.nhs.uk/publication/national-tariff-payment-system-documents-annexes-and-supporting-documents/)). Accessed 21/12/2021.

1  
2

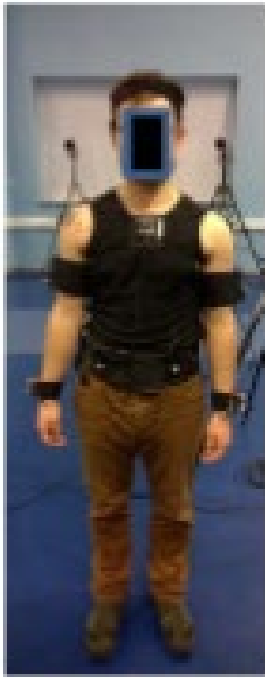

A

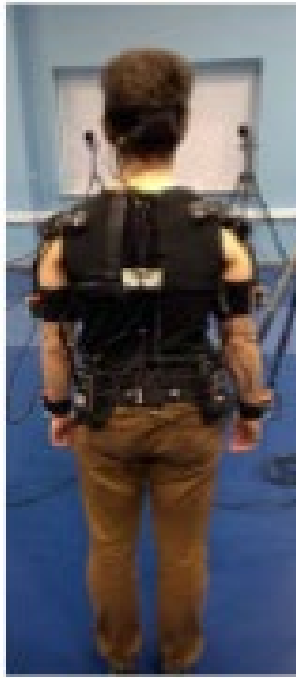

B

1

2 **Figure 1.** Xsens sensors placement, A) front view, B) back view